

FLAMINGO

Bernhard Osann

Manual interaction and flexibility are the cornerstones of Flamingo: the variable weight distribution and central centre of gravity allow the structure to balance itself independently, ensuring stability and freedom of movement without friction. The adjustable light source offers functional or decorative illumination.



2700K

LAMPING

| | |
|-----------------------|---|
| Source | LED UGR linear |
| Total power | 18W |
| Switching | dimnable on board |
| Tension | 220/240V |
| Color temperature led | 2700K |
| Luminous flux led | 1800lm |
| Typ CRI | 90 |
| Ip class | 20 |
| Dimensions | 140x140x10cm |
| Materials | aluminium+brass+stone |
| Notes | Cable length 1,6m, red RAL3002, black RAL9005 |


Codes

FLM LNN 21
FLM LRR 21
FLM LLH 21

Structure

Black / Stone
Red / Stone
Chrome / Stone

Certificazioni

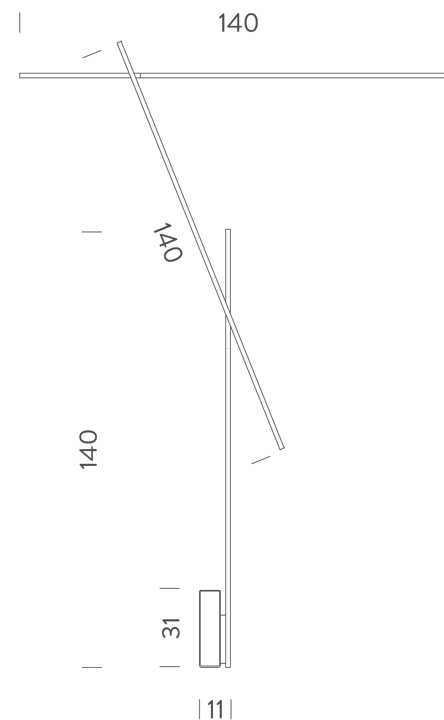

3000K

LAMPING

| | |
|-----------------------|--|
| Source | LED UGR linear |
| Total power | 18W |
| Switching | dimnable on board |
| Tension | 220/240V |
| Color temperature led | 3000K |
| Luminous flux led | 1800lm |
| Typ CRI | 90 |
| Dimensions | 140x140x10cm |
| Materials | aluminium+brass+stone |
| Notes | Cable length 1,6m,red RAL3002, black RAL9005 |

Codes

FLM LNN 22

FLM LRR 22

FLM LLH 22

Certificazioni



Structure

Black / Stone

Red / Stone

Chrome / Stone

